

EZCast Pocket 4K RX & TX 快速指南

Rev 1.2



 EZCast


EZCast 產品訊息如有更改 · 恕不另行通知 ·

關於 EZCast Pocket

發射器 (C-1、H-1)

連接電腦或手機，輕鬆鏡像螢幕的顯示內容。
適合用於觀看影片和分享螢幕內容。

* 兩種型號 (C-1、H-1) 分屬 Type-C 及 HDMI 接頭。

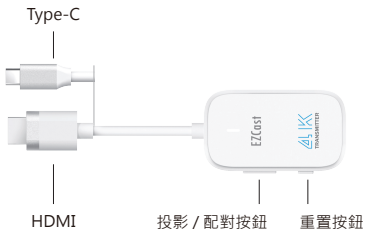

無線顯示接收器 (4KR-1)

連接於 4K TV 或螢幕來顯示您從發射器傳遞的內容。



如何鏡像

1 安裝無線顯示接收器

將無線顯示接收器插到電視 HDMI 接口，並將 Type C 接頭以獨立電源供電 (5V/1A)。

2 發射器接上電腦或手機即可開始投影


將發射器接上電腦或手機的 Type-C 或 HDMI 接口，等待數秒至發射器上的閃燈停止，即開始自動投影。

若使用 H-1 型號的發射器 (HDMI 接頭)，需以 Type-C 接頭連接至獨立電源 (5V/1A) 供電。



3 停止/重新鏡像

點擊發射器上投影 / 配對按鈕，可停止或重新鏡像。




注意：

EZCast 發射器支援 Windows/ macOS 電腦，以及支援 DP 輸出的 Android 手機。長按重置按鈕 5 秒可恢復原廠設定。

如何配對接收器

1 開啟接收器配對模式

- (1) 將無線顯示接收器以 Type-C 接頭連接至電源。
- (2) 將無線顯示接收器 HDMI 端接上螢幕。
- (3) 長按無線顯示接收器按鈕 2 秒左右，待畫面顯示文字 “Release the button to pair with Transmitter” 時放開按鈕。



2 按下發射器上的投影 / 配對按鈕

將發射器接上電腦或手機，若為 H-1 型號，請確保已連接 Type-C 供電。並在畫面顯示 “Ready to pair” 時長按發射器上的投影 / 配對按鈕 5 秒即完成配對。



注意：無線顯示接收器上的重置按鈕，根據按壓時間不同，有兩種設定模式。





- (1) 長按 2 秒：開啟接收器的配對模式，供與發射器進行配對。
- (2) 長按 10 秒：將接收器回復原廠設定。

如何進行線上更新

1 安裝 EZCast App


- (1) 將接收器連接至螢幕，並以 Type-C 接頭連接至電源。
- (2) 使用電腦或手機，掃描 QRCode 或至 www.ezcast.com/app 下載 EZCast app。

2 開啟 SSID 及 PSK 並連線至無線接收器

- (1) 確認螢幕顯示投影設備的 SSID 及 PSK。若無顯示，請長按無線接收器上的重置按鈕 2 秒，透過開啟配對頁面以顯示。
- (2) 將手機或電腦的 Wi-Fi 連線至無線顯示接收器。
- (3) 開啟 EZCast，選擇 ，並依投影設備 SSID 連接接收器。
- (4) 進入設定頁面 ，進入網際網路設定，為接收器連線至網路。
- (5) 確認螢幕上方出現接收器連線至網路的圖示。  ... 



3 使用 EZCast App 進行更新

- (1) 確保手機或電腦與接收器連線至同一網域。
- (2) 進入 EZCast，選擇 ，確認已連線至投影設備接收器。
- (3) 系統自動檢視當前版本狀態，若有最新版本，同意更新以完成系統更新。



產品資訊

發射器

- 天線：1T1R (已裝載)
- 無線網路：5Ghz
- 端口：HDMI 或 Type-C

無線顯示接收器

- 天線：1T1R (已裝載)
- 無線網路：5Ghz
- 端口：HDMI

MIC 警語

Note: 5G band (W52) indoor use only.

NCC 警語

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

FCC statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to this product not authorized by Apple could void the electromagnetic compatibility (EMC) and wireless compliance and negate your authority to operate the product.

This product has demonstrated EMC compliance under conditions that included the use of compliant peripheral devices and shielded cables between system components. It is important that you use compliant peripheral devices and shielded cables between system components to reduce the possibility of causing interference to radios, television sets, and other electronic devices.

RF Exposure Statement(Receiver):

To maintain compliance with FCC's RF Exposure guidelines, this equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

SAR statement (Transmitter):

This device meets the government's requirements for exposure to radio waves. This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government.

The SAR limit set by the FCC is 1.6W/Kg. For body-worn operation, this device has been tested and meets the FCC RF exposure guidelines for use with an accessory that contains no metal and positions the device a minimum of 0mm from the body. RF exposure compliance with any body-worn accessory that contains metal was not tested and certified. And use of such body-worn accessory should be avoided. Accessory available in market and must be used to keep use distance 0mm from EUT to body-worn operation.



Website: <https://www.EZCast.com>

YouTube: <https://www.YouTube.com/EZCast>